



Please follow the steps below to set your RSA SecurID Token PIN.


1. Open Internet Explorer from a GOA Zone 4 workstation and browse to <https://rsa.jsg.alberta.ca/>. Please note that this URL is not accessible from the public internet.
2. At the resulting page (see the sample screenshot below), click “Continue to this website (not recommended).”

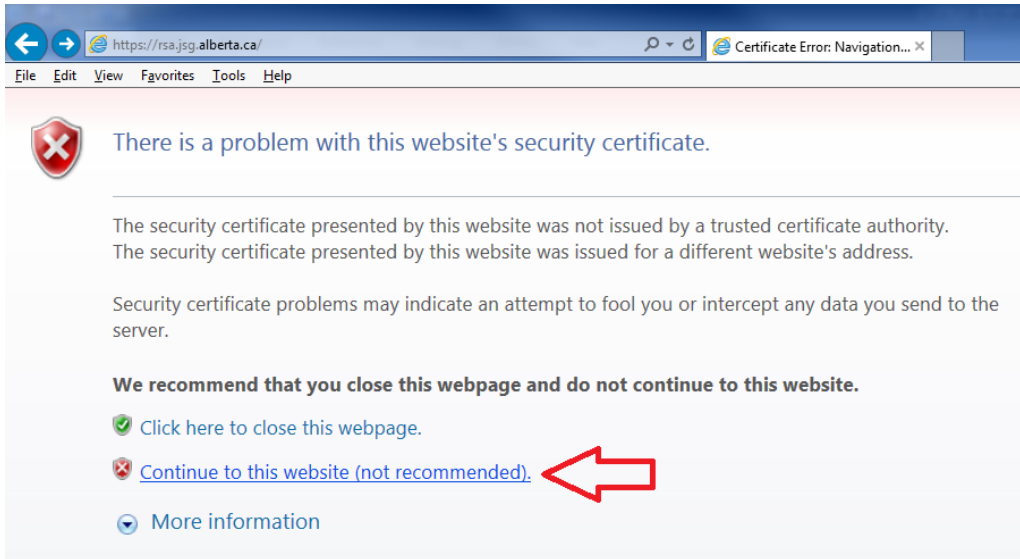

3. At the **RSA Security Console** page, enter your Domain User ID that has been assigned the RSA SecurID token, and click “OK”. Domain User IDs are typically firstname.lastname or firstname.lastname.zx for administrator accounts, x being the first character of domain name (ie. .zs for secure.ds administrator account)

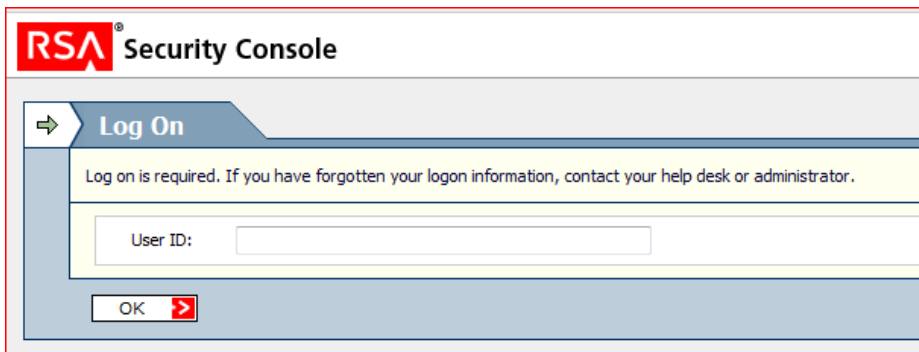

4. At the **Authentication Method** field, select “Passcode” and enter the number on your RSA SecurID Token FOB screen to the **SecurID Passcode** field.

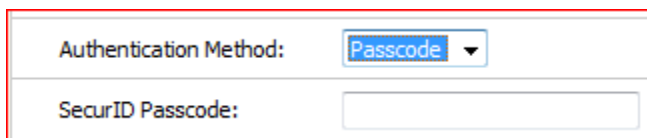

5. You will then be prompted to create your PIN.